

The VISOR® Code Reader reads whatever's printed, dot peened and lasered.

System description

With its integrated object detection, the VISOR® Code Reader is unique in its price segment. The compact sensor reads conventional 1D bar codes, 2D data matrix codes and now also optical characters (OCR). It also has four detectors for object detection (pattern comparison, brightness, grey level and contrast), with which other object features – for example, stamps or logos – can be evaluated in a single reading pass. Codes and object features are even reliably detected with deviations from the taught-in position – using position tracking (optionally activated).


A special image filter with expanded setting options guarantees excellent reading performance even under difficult reading conditions. The test results can largely be evaluated within the sensor itself – with the option of string comparison or regular print-outs – so that there is no need for a PLC or PC connection in many cases. If, however, this proves necessary, it can be easily and flexibly connected using freely available PLC function blocks for Siemens S7, Codesys and Allen Bradley.

With integrated quality parameters complying with ISO and AIM standards, the VISOR® Code Reader also permits the informative evaluation of printed and direct marked 1D and 2D codes. Integrated red, infrared or white light variants provide maximum functional reliability through optimum code illumination.

In addition, the robust, compact and industry-oriented housings guarantee reliability even where space is restricted. Integrated 6 mm or 12 mm optics or C-mount devices also save effort and costs through their optimum adaptation to the most varied of code sizes and operating distances. The new V20 variants also offer a resolution of 1.3 megapixels for particularly small codes or large search areas.

VISOR® Code Reader product variants


| Features/sensors | Standard | Advanced | Professional |
|---|-----------|-------------------------------------|--|
| Functions | | | |
| V10 resolution in pixels | 736 x 480 | 736 x 480 | – |
| V20 resolution in pixels | – | 1280 x 1024 | 1280 x 1024 |
| Image rate per second V10 V20 | 50 – | 50 40 | – 40 |
| Number of jobs detectors | 8 2 | max. 255 max. 255 | max. 255 max. 255 |
| Position tracking | – | ✓ | ✓ |
| Pattern comparison (X-,Y-translation) | – | ✓ | ✓ |
| Grey threshold | – | ✓ | ✓ |
| Contrast | – | ✓ | ✓ |
| Brightness | – | ✓ | ✓ |
| Data code | ✓ | ✓ | ✓ |
| Bar code | ✓ | ✓ | ✓ |
| OCR | – | – | ✓ |
| Freeform Tool | – | ✓ | ✓ |
| | | (not with data codes and bar codes) | (not with data codes, bar codes and OCR) |
| Interfaces | | | |
| Inputs outputs | 2 4 | 2 4 | 2 4 |
| Freely definable switching outputs/inputs, PNP or NPN | 2 | 4 | 4 |
| Encoder input | – | ✓ | ✓ |
| I/O expansion | ✓ | ✓ | ✓ |
| RS422 RS232 | ✓ ✓ | ✓ ✓ | ✓ ✓ |
| Ethernet / data transmission | ✓ | ✓ | ✓ |
| EtherNet / IP | ✓ | ✓ | ✓ |
| PROFINET | ✓ | ✓ | ✓ |
| Lens | | | |
| V10: integrated 6 mm 12 mm 25 mm | ✓ ✓ ✓ | ✓ ✓ ✓ | – |
| V20: integrated 12 mm | – | ✓ | ✓ |
| C-mount | – | ✓ | ✓ |
| Operation / visualisation | | | |
| Viewer software with user guidance | ✓ | ✓ | ✓ |
| Hierarchised user rights | ✓ | ✓ | ✓ |




Dot peened code on rough substrate
Code is made legible by powerful reading algorithm. Presence of the nailed imprint in plain text can be checked using object detection.



Low-contrast code
Code is made legible through high tolerance – also towards weakly contrasting codes.



Optical character reading
Dot matrix printing can also be read with OCR



Code with small "quiet zone"
Even codes with a small quiet zone or damaged finder pattern can be read.



Code reading on solar cells
Even extremely small codes (e.g. on silicon solar cells) or highly reflective codes (e.g. on thin-layer solar cells) can be read.



Printed codes on pharmaceutical packaging
ECC200 or bar codes (e.g. EAN 13) can be searched for simultaneously. In addition to code reading, the presence of optical characters can also be checked using object detection.

Special features of the VISOR[®] Code Reader

- Can be used for all common 2D codes (e.g. ECC 200 data matrix) and common 1D bar codes
- Optimum cost-effectiveness through combination of two functions in one device: code reading and object detection
- High operating dependability through reliable detection of even poorly readable codes under difficult ambient conditions
- Flexible and simple connection to PC and PLC environments due to comprehensive possibilities for archiving pictures and read results, as well as freely available PLC function blocks for Siemens S7, Codesys and Allen Bradley
- Very high flexibility, e.g. also due to reading several similar or different codes in one reading pass
- Reading of optical characters with OCR based on neuronal networks, particularly suitable for point printing

VISOR® V20 Code Reader

Advanced vision sensor for code reading with object detection, 12 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 1280 × 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | 30 mm to infinity | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | White, red, infrared, UV (400 nm) LEDs | | |
| Minimum field of view, X × Y | 16 × 13 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4 V DC ¹ | Dimensions | 65 × 45 × 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ³ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ³ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² with VGA-resolution (640 × 480 pixels) ³ 80 % air humidity, non-condensing

| Illumination | Part number | Article number |
|--------------|---------------|----------------|
| White | V20-CR-A2-W12 | 536-91001 |
| Red | V20-CR-A2-R12 | 536-91002 |
| Infrared | V20-CR-A2-I12 | 536-91003 |
| UV (400 nm) | V20-CR-A2-U12 | 536-91019 |


VISOR® vision sensor

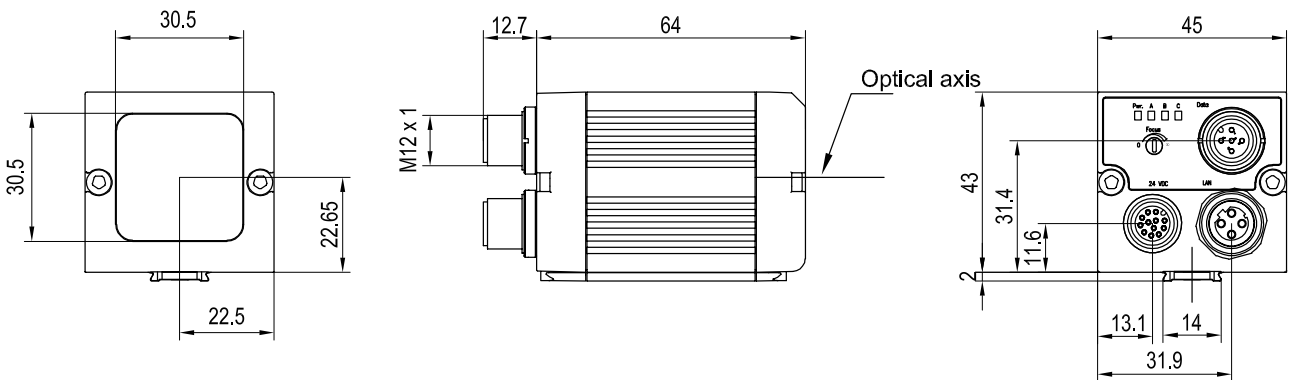

153-00911


5

Field of view

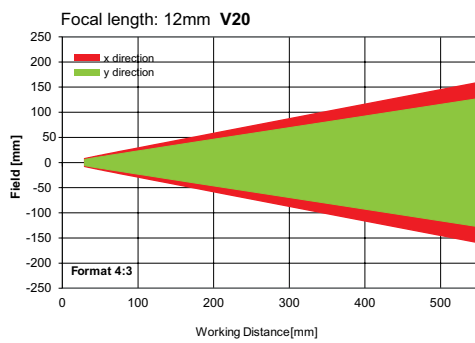

155-01637

Depth of field: normal

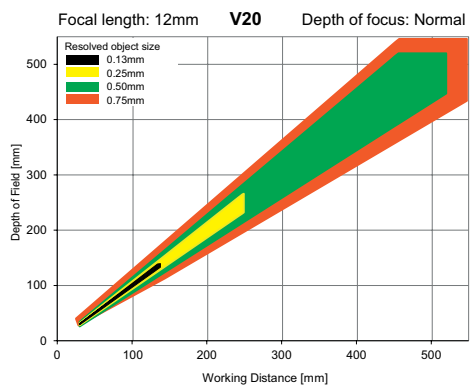

155-01636

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V20 Code Reader Color

Advanced vision sensor for code reading with object detection, 12 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Code reading of colour image
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 1280 × 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", colour | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | 30 mm to infinity | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | White LEDs | | |
| Minimum field of view, X × Y | 16 × 13 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4V DC ¹ | Dimensions | 65 × 45 × 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ³ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ³ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1V, Low < 3V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² with VGA-resolution (640 × 480 pixels) ³ 80 % air humidity, non-condensing

| Illumination | Part number | Article number |
|--------------|----------------|----------------|
| White | V20C-CR-A2-W12 | 536-91026 |


VISOR® vision sensor

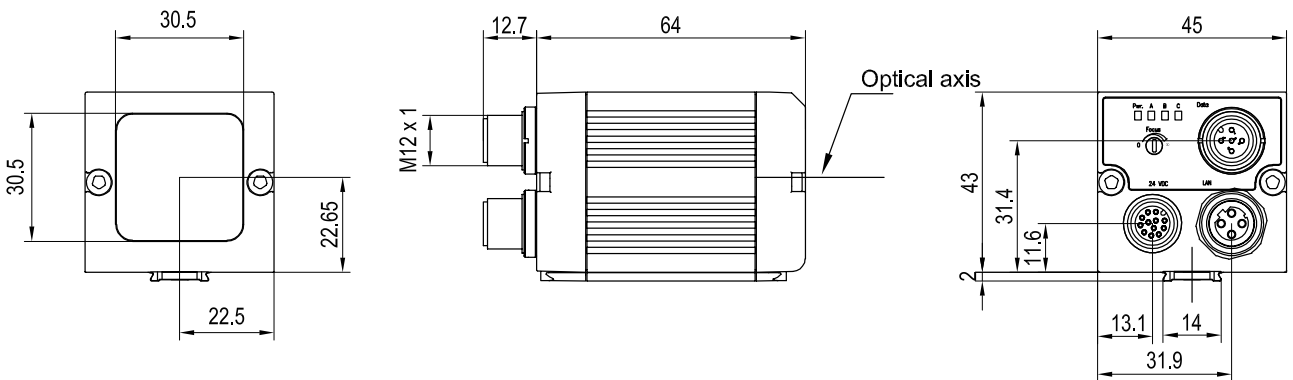

153-00911


5

Field of view

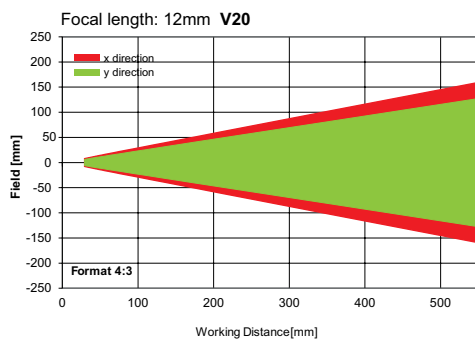

155-01637

Depth of field: normal

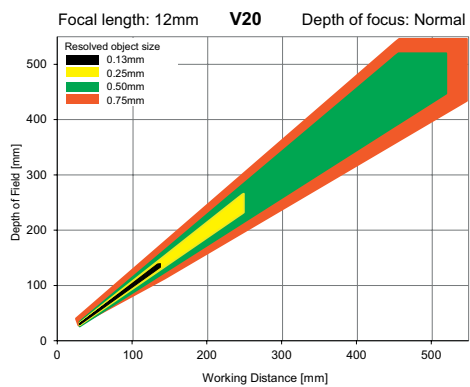

155-01636

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V20 Code Reader

Advanced vision sensor for code reading with object detection, C-mount




PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 1280 × 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | C-mount | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | Dependent on lens | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | None | | |
| Minimum field of view, X × Y | Dependent on lens | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4V DC ¹ | Dimensions | 65 × 45 × 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 65 ³ |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ⁴ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ⁴ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² With VGA-resolution (640 × 480 Pixel) ³ With LPT45 C-mount protective casing ⁴ 80 % air humidity, non-condensing

| Part number | Article number |
|-------------|----------------|
| V20-CR-A2-C | 536-91000 |

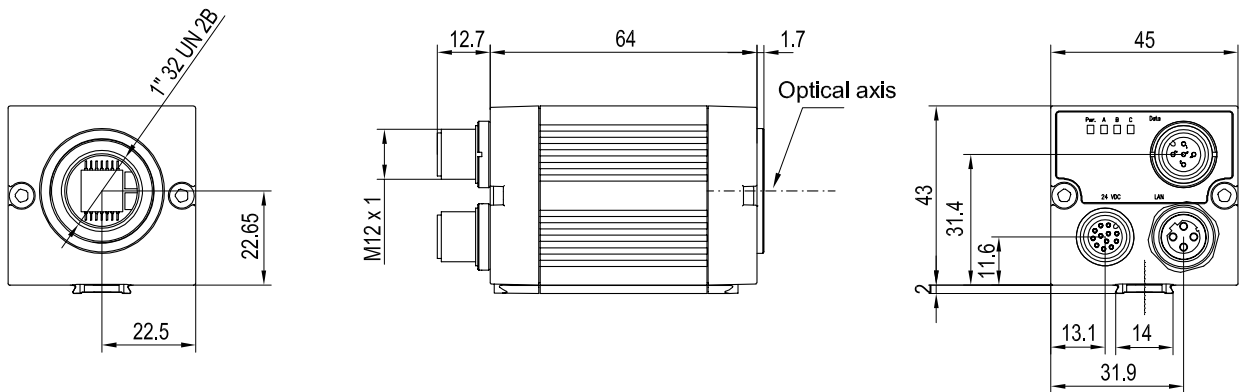VISOR® vision sensor


153-00912

5

Lens


| | LO C 8 | LO C 12 | LO C 16 | LO C 25 | LO C 35 | LO C 50 | LO C 75 |
|-----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Focal length | 8 mm | 12 mm | 16 mm | 25 mm | 35 mm | 50 mm | 75 mm |
| Article number | 526-51513 | 526-51514 | 526-51515 | 526-51516 | 526-51525 | 526-51113 | 526-51116 |

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Lenses | From Page A-25 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V20 Code Reader

Professional vision sensor for code reading, object detection and OCR, 12 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass
- Reading of optical characters with OCR

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 1280 x 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code, OCR |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417; OCR: optical character reading |
| Adjustment range | 30 mm to infinity | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code; typ. 15 ms per character OCR |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 16 x 13 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4 V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ³ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ³ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² With VGA-resolution (640 x 480 Pixel) ³ 80 % air humidity, non-condensing

| Illumination | Part number | Article number |
|--------------|---------------|----------------|
| White | V20-CR-P2-W12 | 536-91005 |
| Red | V20-CR-P2-R12 | 536-91006 |
| Infrared | V20-CR-P2-I12 | 536-91007 |


VISOR® vision sensor

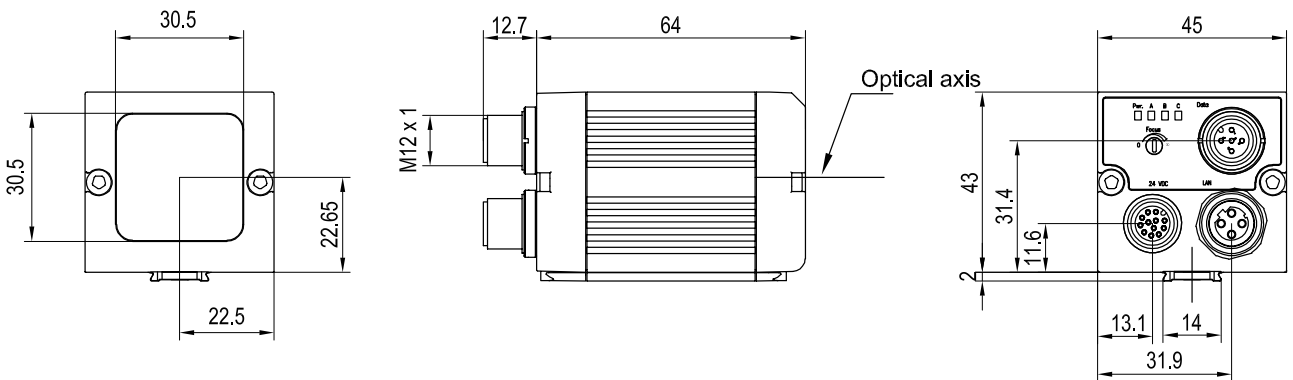

153-00911


5

Field of view

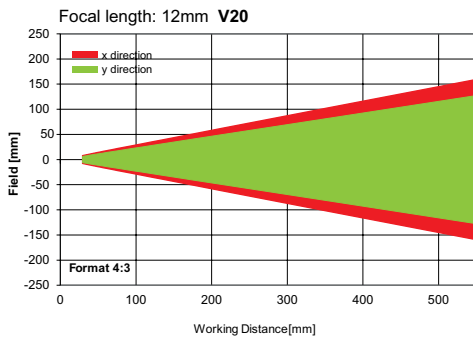

155-01637

Depth of field: normal

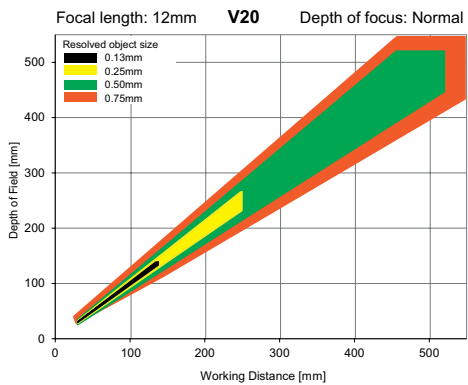

155-01636

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V20 Code Reader Color

Professional vision sensor for code reading, object detection and OCR, 12 mm






PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Code reading of colour image
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass
- Reading of optical characters with OCR

| Optical data | | Functions | |
|--|---|---------------------------------|--|
| Resolution | 1280 x 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", colour | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code, OCR |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417; OCR: optical character reading; colour area: two-dimensional colour inspection with adjustable tolerance; colour list: finding the most similar colours |
| Adjustment range | 30 mm to infinity | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code; colour list typ. 15 ms per character OCR; colour value; typ. 30 ms colour area; typ. 2 ms |
| Integrated illumination | White, LEDs | | |
| Minimum field of view, X x Y | 16 x 13 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ³ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ³ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1V, Low < 3V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² With VGA-resolution (640 x 480 Pixel) ³ 80 % air humidity, non-condensing

| Illumination | Part number | Article number |
|--------------|----------------|----------------|
| White | V20C-CR-P2-W12 | 536-91027 |

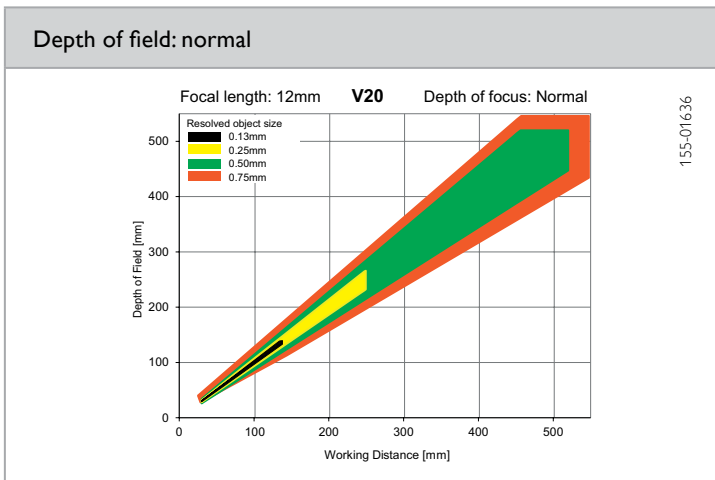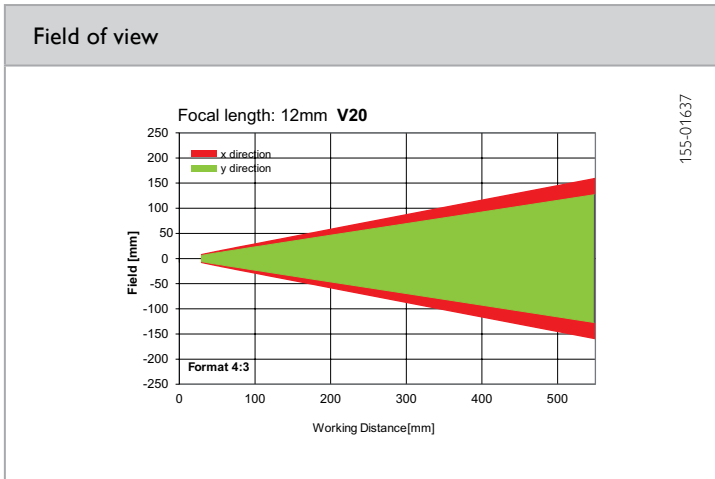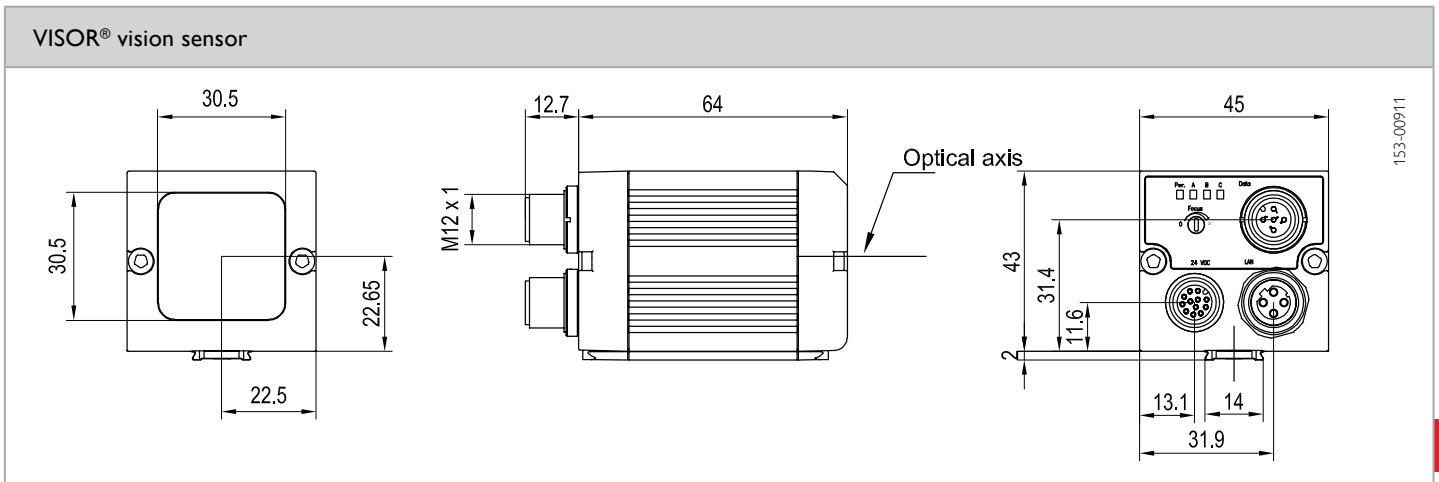

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V20 Code Reader

Professional vision sensor for code reading, object detection and OCR, C-mount




PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass
- Reading of optical characters with OCR

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 1280 x 1024 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/1.8", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code, OCR |
| Integrated lens, focal length | C-mount | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417; OCR: optical character reading |
| Adjustment range | Dependent on lens | Typical cycle time ² | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code; typ. 15 ms per character OCR |
| Integrated illumination | None | | |
| Minimum field of view, X x Y | Dependent on lens | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4 V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 65 ³ |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ⁴ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ⁴ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Power and I/O M12 12-pin Ethernet M12 4-pin Data M12 5-pin |
| Input resistance | > 20 kΩ | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² With VGA-resolution (640 x 480 Pixel) ³ With LPT45 C-mount protective casing ⁴ 80 % air humidity, non-condensing

| Part number | Article number |
|-------------|----------------|
| V20-CR-P2-C | 536-91004 |

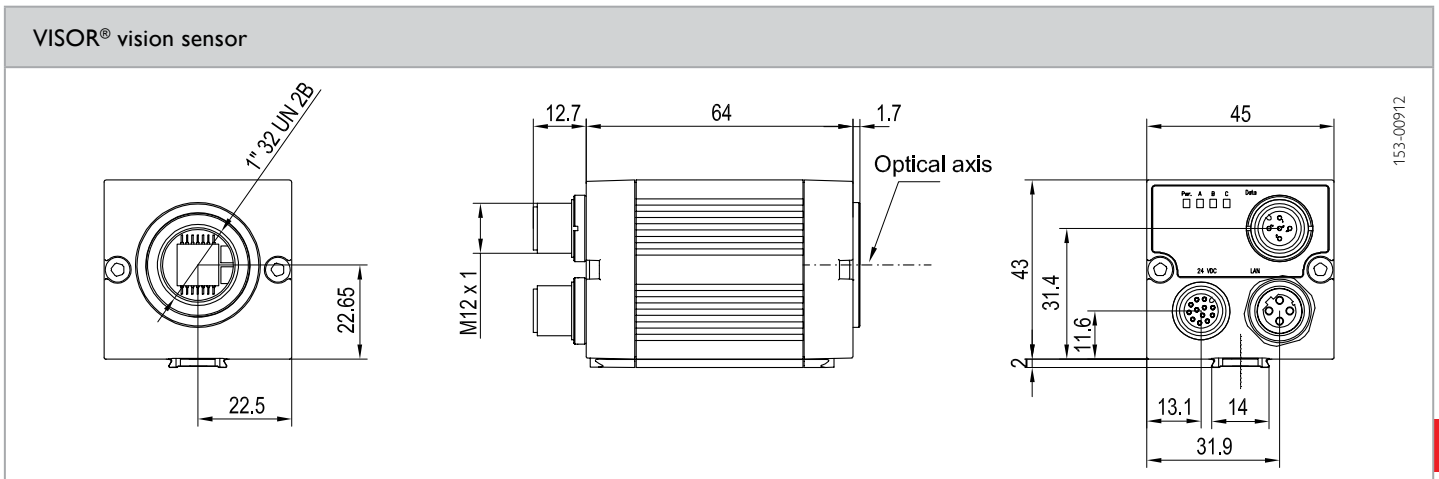

| | LO C 8 | LO C 12 | LO C 16 | LO C 25 | LO C 35 | LO C 50 | LO C 75 |
|-----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Focal length | 8 mm | 12 mm | 16 mm | 25 mm | 35 mm | 50 mm | 75 mm |
| Article number | 526-51513 | 526-51514 | 526-51515 | 526-51516 | 526-51525 | 526-51113 | 526-51116 |

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Lenses | From Page A-25 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Standard vision sensor for code reading, 6 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments

| Optical data | | Functions | |
|--|---|---------------------------------|--|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | 8 / 2 |
| CMOS | 1/3", monochrome | Detectors | Bar code / data code |
| Integrated lens, focal length | 6 mm, adjustable focal position | Properties | UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes, ECC200, QR code, PDF 417 |
| Adjustment range | 6 mm to infinity | Typical cycle time | Typ. 30 ms bar code Typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 5 x 4 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1V, Low < 3V | Plug connection | Power and I/O M12, 12pin Ethernet M12, 4pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 2 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² 80 % air humidity, non-condensing

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|---------------|----------------|
| White | Normal | V10-CR-S1-W6 | 535-91034 |
| White | Enhanced | V10-CR-S1-W6D | 535-91036 |
| Red | Normal | V10-CR-S1-R6 | 535-91038 |
| Red | Enhanced | V10-CR-S1-R6D | 535-91040 |
| Infrared | Normal | V10-CR-S1-I6 | 535-91042 |
| Infrared | Enhanced | V10-CR-S1-I6D | 535-91044 |


VISOR® vision sensor

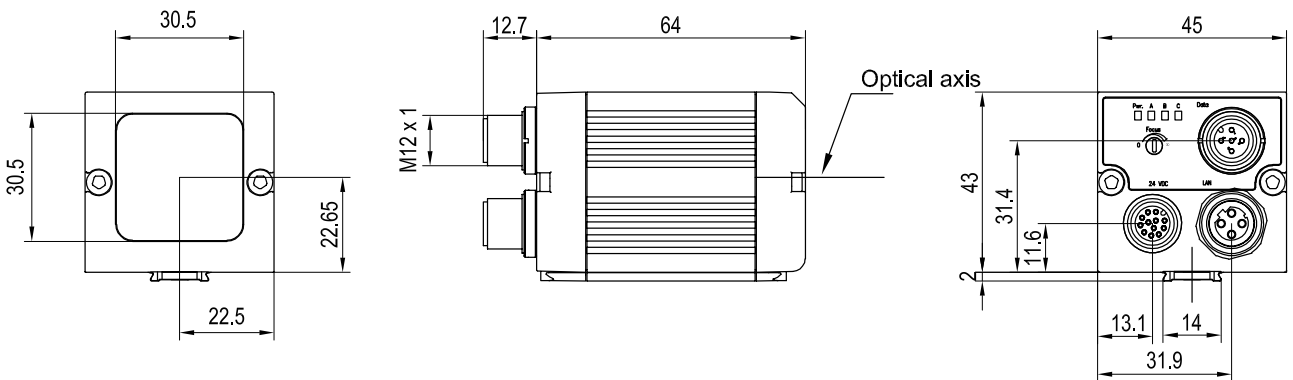

153-00911


5

Field of view

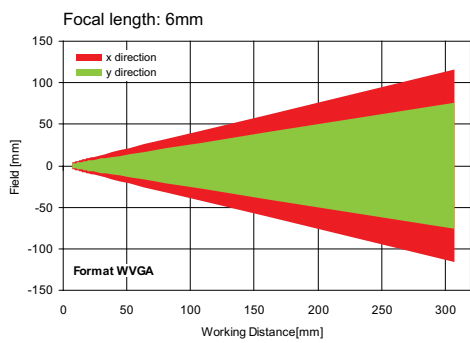


155-01422

Depth of field: normal

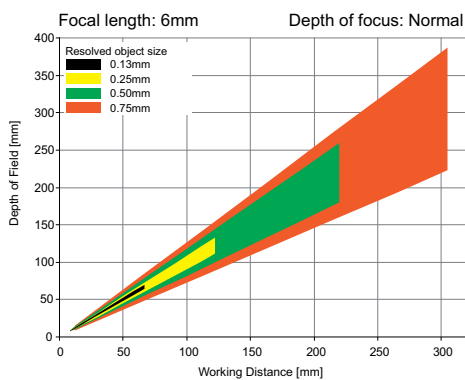

155-01409

Depth of field: enhanced

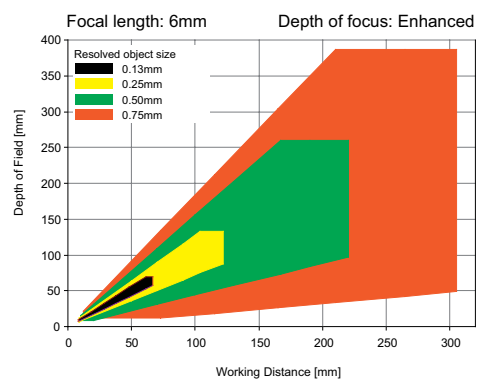

155-01421

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Standard vision sensor for code reading, 12 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments

| Optical data | | Functions | |
|--|---|---------------------------------|--|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | 8 / 2 |
| CMOS | 1/3", monochrome | Detectors | Bar code / data code |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | Bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes, ECC200, QR code, PDF 417 |
| Adjustment range | 30 mm to infinity | Typical cycle time | Typ. 30 ms bar code Typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 8 x 6 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1V, Low < 3V | Plug connection | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 2 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² 80 % air humidity, non-condensing


| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|----------------|----------------|
| White | Normal | V10-CR-S1-W12 | 535-91035 |
| White | Enhanced | V10-CR-S1-W12D | 535-91037 |
| Red | Normal | V10-CR-S1-R12 | 535-91039 |
| Red | Enhanced | V10-CR-S1-R12D | 535-91041 |
| Infrared | Normal | V10-CR-S1-I12 | 535-91043 |
| Infrared | Enhanced | V10-CR-S1-I12D | 535-91045 |

VISOR® vision sensor

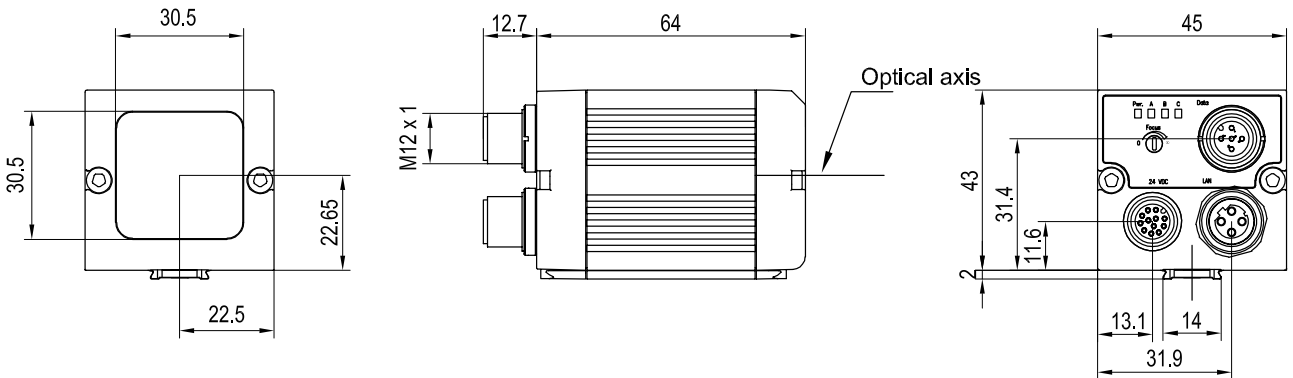


5


Field of view

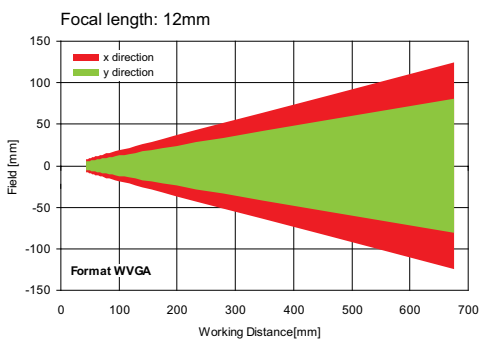

Depth of field: normal

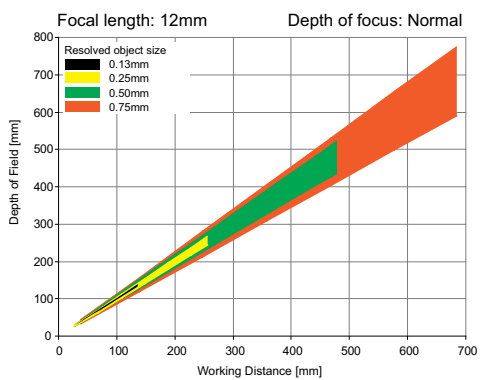

Depth of field: enhanced

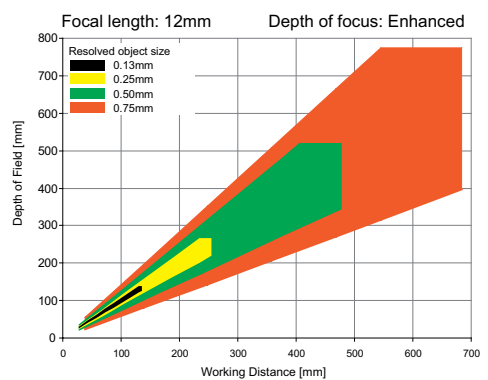

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Standard vision sensor for code reading, 25 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments

| Optical data | | Functions | |
|--|---|---------------------------------|--|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | 8 / 2 |
| CMOS | 1/3", monochrome | Detectors | Bar code / data code |
| Integrated lens, focal length | 25 mm, adjustable focal position | Properties | Bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes, ECC200, QR code, PDF 417 |
| Adjustment range | 140 mm to infinity | Typical cycle times | Typ. 30 ms bar code Typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 18 x 14 mm ² | | |
| | | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _b | 18 ... 26.4V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _b / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _b -1V, Low < 3V | Plug connections | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5 V_{SS} ² 80 % air humidity, non-condensing

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|---------------|----------------|
| White | Normal | V10-CR-S2-W25 | 535-91088 |
| Red | Normal | V10-CR-S2-R25 | 535-91089 |
| Infrared | Normal | V10-CR-S2-I25 | 535-91090 |


VISOR® vision sensor

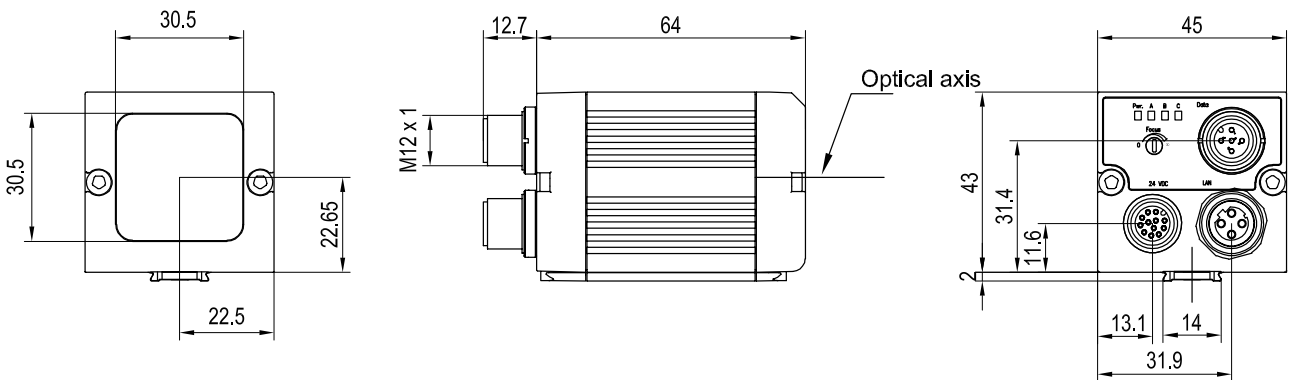

153-00911


5

Field of view

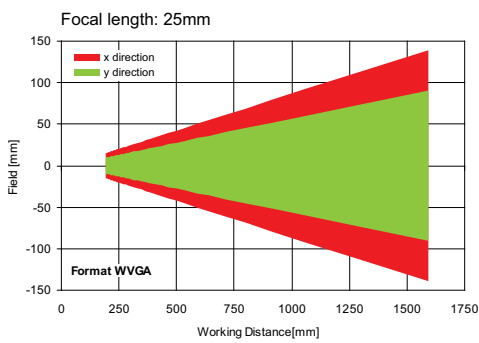

155-01424

Depth of field: normal

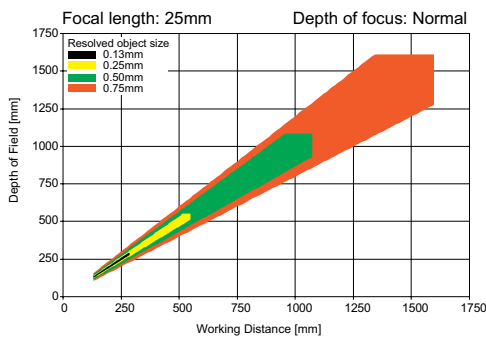

155-01412

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Advanced vision sensor for code reading with object detection, 6 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|--|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/3", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | 6 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrasts; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes, ECC200, QR code, PDF 417 |
| Adjustment range | 6 mm to infinity | Typical cycle time | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 5 x 4 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4 V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |




¹ Max. ripple < 5 V_{SS} ² 80 % air humidity, non-condensing

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|---------------|----------------|
| White | Normal | V10-CR-A1-W6 | 535-91021 |
| White | Enhanced | V10-CR-A1-W6D | 535-91023 |
| Red | Normal | V10-CR-A1-R6 | 535-91025 |
| Red | Enhanced | V10-CR-A1-R6D | 535-91027 |

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|---------------|----------------|
| Infrared | Normal | V10-CR-A1-I6 | 535-91029 |
| Infrared | Enhanced | V10-CR-A1-I6D | 535-91031 |

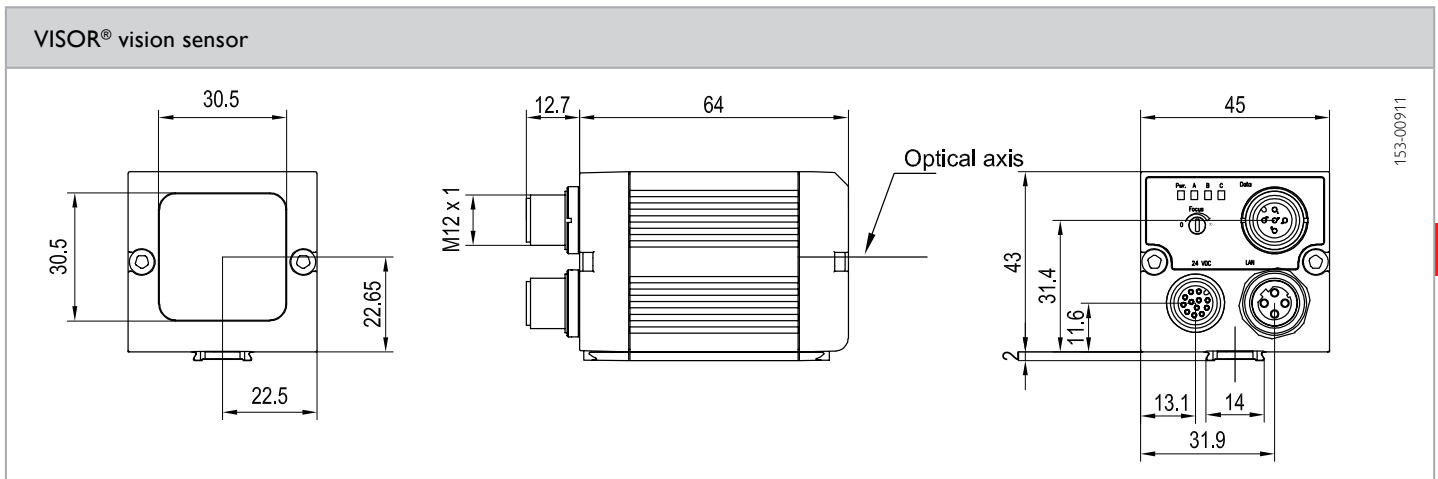

5

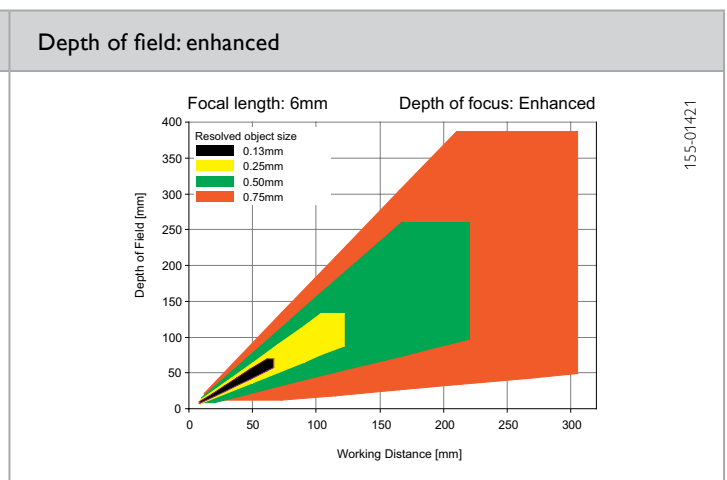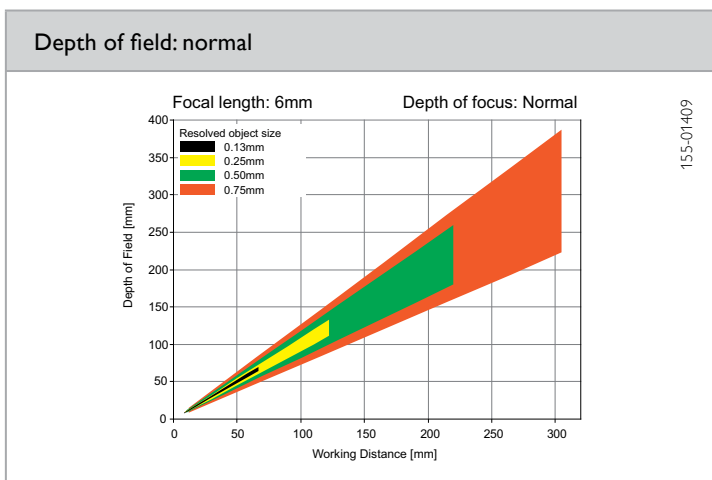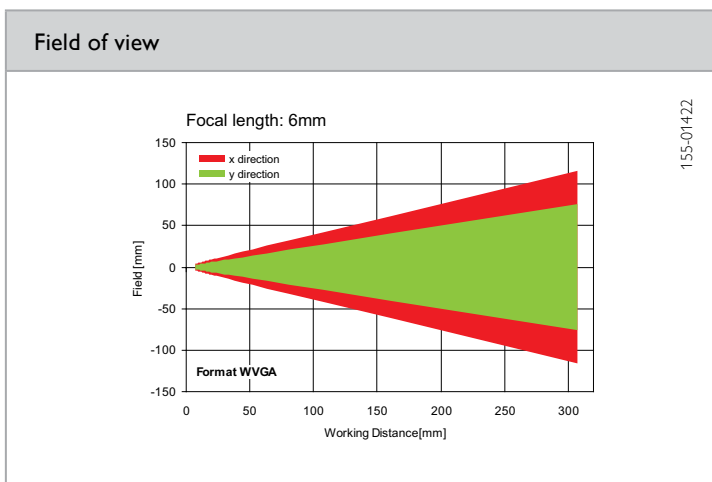

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Advanced vision sensor for code reading with object detection, 12 mm



PRODUCT HIGHLIGHTS





- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/3", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | 12 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | 30 mm to infinity | Typical cycle time | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X x Y | 8 x 6 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _B | 18 ... 26.4 V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _B / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _B -1 V, Low < 3 V | Plug connection | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4 V | | |
| Interfaces | Ethernet (LAN), RS422, RS232 EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5 V_{SS} ² 80 % air humidity, non-condensing

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|----------------|----------------|
| White | Normal | V10-CR-A1-W12 | 535-91022 |
| White | Enhanced | V10-CR-A1-W12D | 535-91024 |
| Red | Normal | V10-CR-A1-R12 | 535-91026 |
| Red | Enhanced | V10-CR-A1-R12D | 535-91028 |

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|----------------|----------------|
| Infrared | Normal | V10-CR-A1-I12 | 535-91030 |
| Infrared | Enhanced | V10-CR-A1-I12D | 535-91032 |

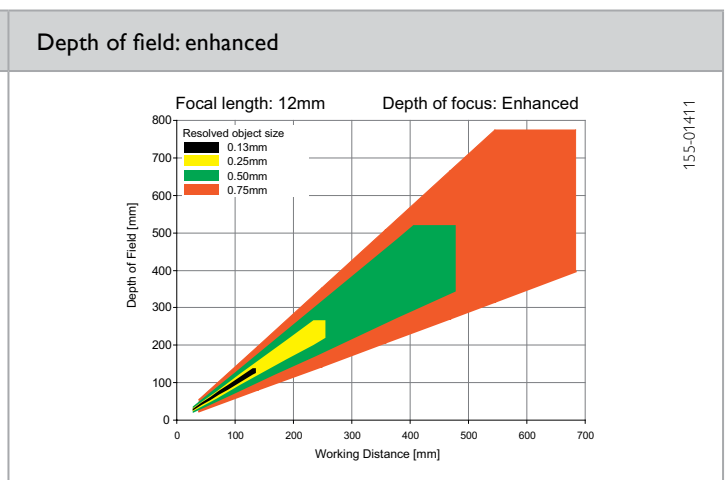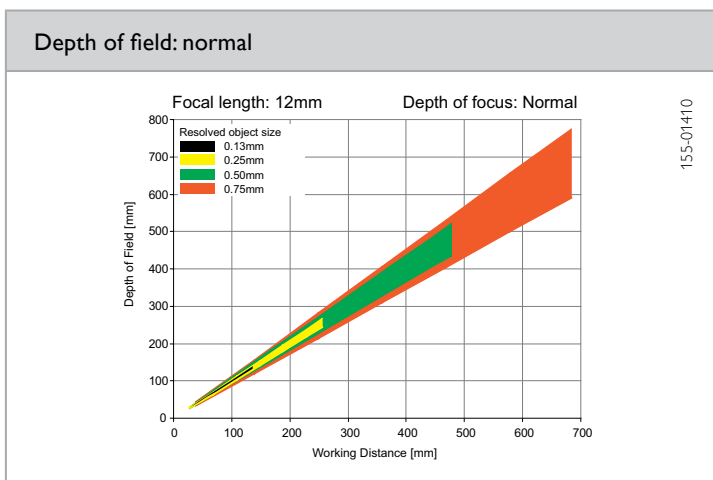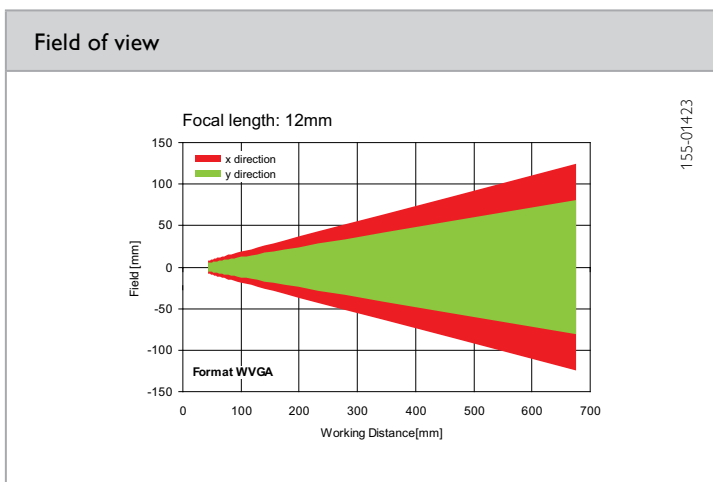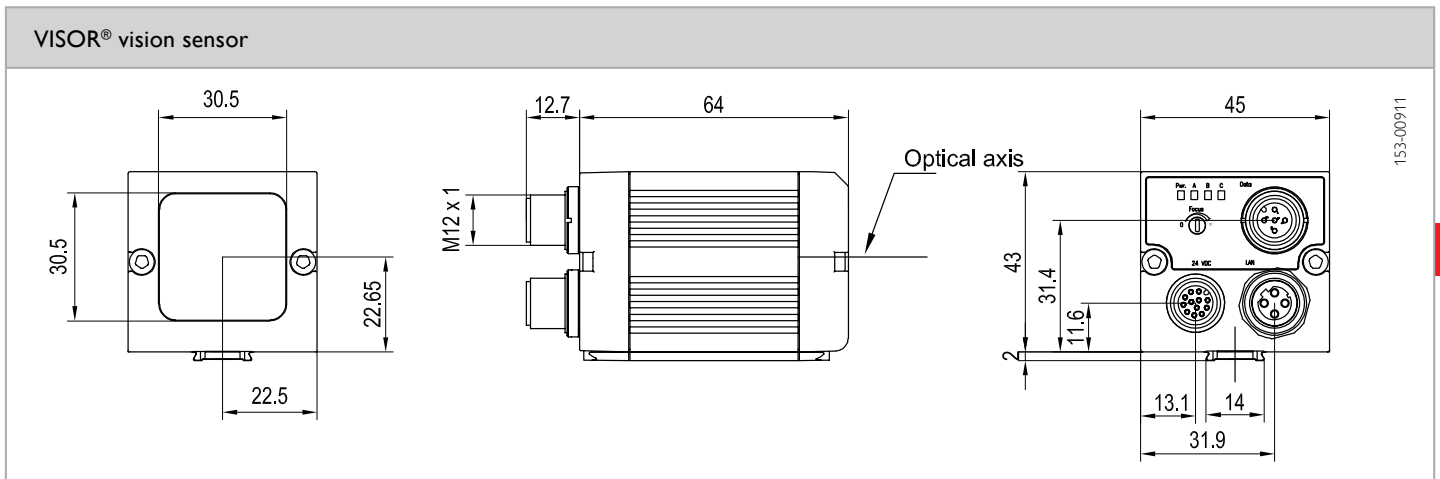

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Advanced vision sensor code reading with object detection, 25 mm



PRODUCT HIGHLIGHTS


- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 736 × 480 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/3", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | 25 mm, adjustable focal position | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | 140 mm to infinity | Typical cycle times | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | White, red, infrared LEDs | | |
| Minimum field of view, X × Y | 18 × 14 mm ² | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _b | 18 ... 26.4V DC ¹ | Dimensions | 65 × 45 × 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 67 |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _b / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ² |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ² |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _b -1V, Low < 3V | Plug connections | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4V | | |
| Interfaces | Ethernet (LAN), RS422, RS232, EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² 80 % air humidity, non-condensing

| Illumination | Depth of field | Part number | Article number |
|--------------|----------------|---------------|----------------|
| White | Normal | V10-CR-A2-W25 | 535-91084 |
| Red | Normal | V10-CR-A2-R25 | 535-91085 |
| Infrared | Normal | V10-CR-A2-I25 | 535-91086 |


VISOR® vision sensor

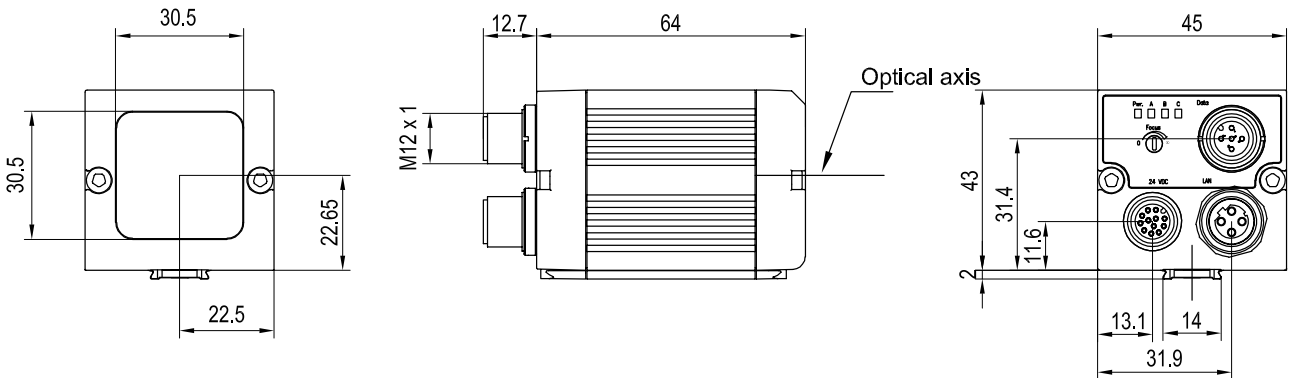

153-00911


5

Field of view

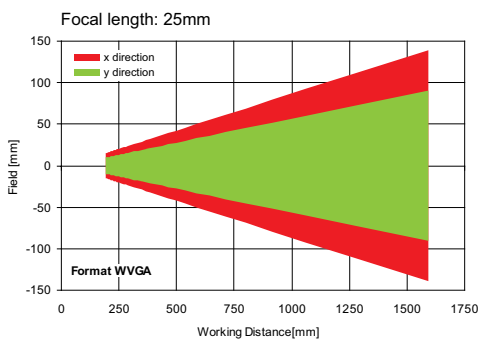

155-01424

Depth of field: normal

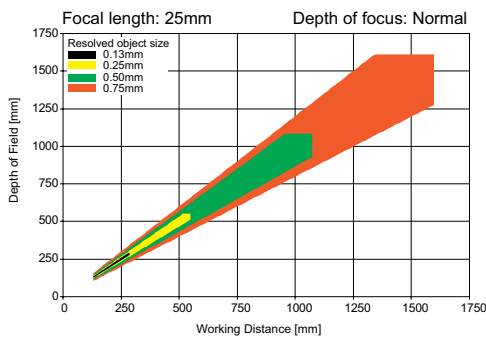

155-01412

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |

VISOR® V10 Code Reader

Advanced vision sensor for code reading with object detection, C-mount




PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D bar codes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass

| Optical data | | Functions | |
|--|---|---------------------------------|---|
| Resolution | 736 x 480 pixels | Number of jobs / detectors | max. 255 / max. 255 |
| CMOS | 1/3", monochrome | Detectors | Pattern comparison, contrast, brightness, grey level, bar code, data code |
| Integrated lens, focal length | C-mount | Properties | X/Y position tracking; pattern comparison: teach-in and pattern detection; grey level, brightness: evaluation of brightness; contrast: evaluation of contrast; bar code: reading of 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, Code 32, Code 39, Code 93, Code 128, GS1, Pharmacode, Codabar; data code: reading of 2D codes: ECC200, QR code, PDF 417 |
| Adjustment range | Dependent on lens | Typical cycle time | Typ. 20 ms pattern comparison; typ. 2 ms brightness; typ. 2 ms contrast; typ. 2 ms grey level; typ. 30 ms bar code; typ. 40 ms data code |
| Integrated illumination | None | | |
| Minimum field of view, X x Y | Dependent on lens | | |
| Electrical data | | Mechanical data | |
| Operating voltage, +U _b | 18 ... 26.4V DC ¹ | Dimensions | 65 x 45 x 45 mm ³ (without plug) |
| Current consumption (without illumination and I/O) | ≤ 120 mA | Enclosure rating | IP 65 ² |
| Current consumption (without I/O) | ≤ 200 mA | Material, housing | Aluminium, plastic |
| Protective circuits | Reverse-polarity protection, U _b / short-circuit protection of all outputs | Material, front screen | Plastic |
| Power On Delay | Ca. 13 s after Power on | Ambient temperature: operation | 0 ... +50 °C ³ |
| Outputs | PNP / NPN (switchable) | Ambient temperature: storage | -20 ... +60 °C ³ |
| Max. output current (per output) | 50 mA, 100 mA (pin 12) | Weight | Ca. 160 g |
| Inputs | PNP/NPN High > U _b -1 V, Low < 3 V | Plug connection | Supply and I/O M12, 12-pin Ethernet M12, 4-pin Data M12, 5-pin |
| Input resistance | > 20 kOhm | Vibration and impact resistance | EN 60947-5-2 |
| Encoder input | High > 4V | | |
| Interfaces | Ethernet (LAN), RS422, RS232 EtherNet/IP, PROFINET | | |
| Inputs/outputs | 2 inputs, 4 outputs, 4 selectable inputs/outputs | | |

¹ Max. ripple < 5V_{SS} ² With LPT45 C-mount protective casing ³ 80 % air humidity, non-condensing

| Part number | Article number |
|-------------|----------------|
| V10-CR-A1-C | 535-91033 |

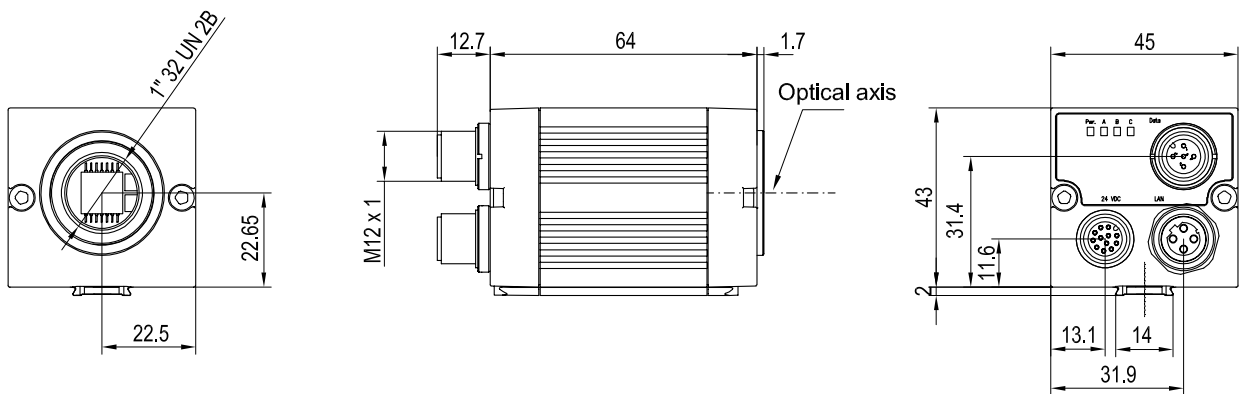VISOR® vision sensor


153-00912

5

Lens


| | LO C 8 | LO C 12 | LO C 16 | LO C 25 | LO C 35 | LO C 50 | LO C 75 |
|-----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Focal length | 8 mm | 12 mm | 16 mm | 25 mm | 35 mm | 50 mm | 75 mm |
| Article number | 526-51513 | 526-51514 | 526-51515 | 526-51516 | 526-51525 | 526-51113 | 526-51116 |

Accessories

| | |
|-----------------------|----------------|
| Connection cables | From Page A-34 |
| Illumination | From Page A-27 |
| Lenses | From Page A-25 |
| Brackets | From Page A-4 |
| Interface accessories | From Page A-38 |