

JDK-T SERIES JDK-60T / -80T / -100T



FEATURES

- Compact design
- Low energy consumption
- Protective auto-stopper switch
- Aluminium housing
- Connecting hose included




TECHNICAL DATA

MODEL			JDK-T-60	JDK-T-80	JDK-T-100
Air Flow ¹	l/min	0 mbar	130	145	150
		50 mbar	125	130	145
		100 mbar	105	115	130
		150 mbar	85	90	110
		200 mbar	60	75	95
Voltage ²	VAC		230		
Power Consumption	W	200mbar	40	58	78
Noise Level	dB(A)		36	38	42
Dimensions	mm	L x W x H	250 x 200 x 184.5		
Connection	mm	∅ outside	19		
Net Weight	kg		8.5		


¹ Product performance may vary +/- 10% from performance curves

² Values at 50HZ

PERFORMANCE DATA

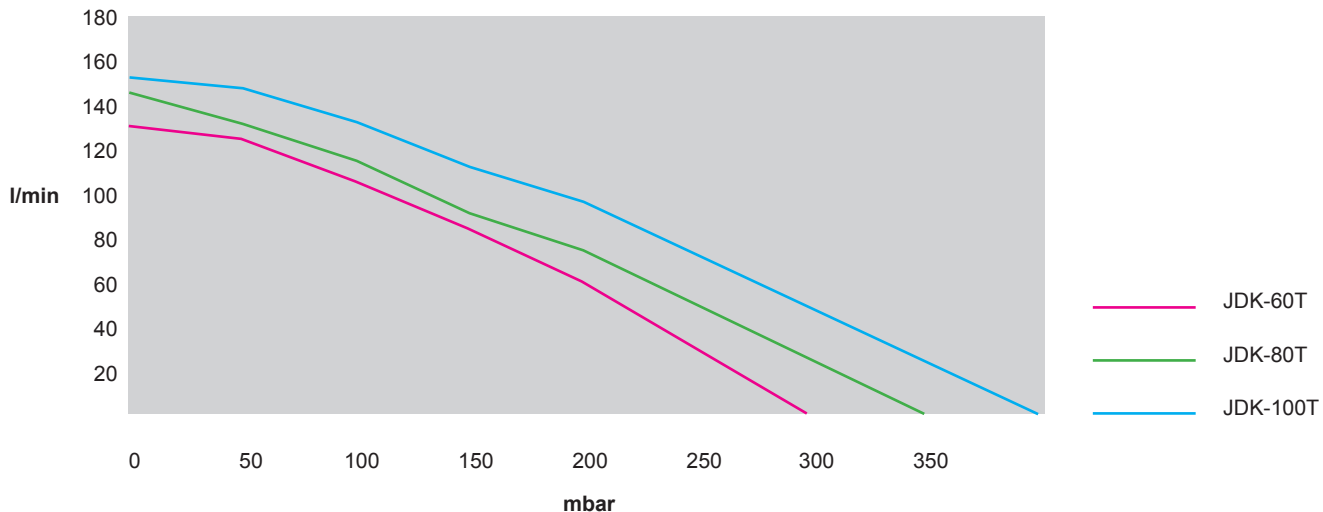

DIMENSIONS

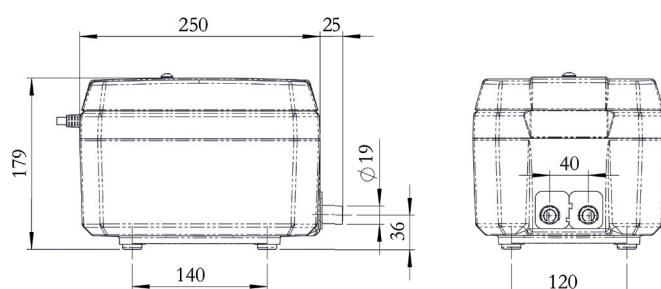

SPARES

SERVICE KIT	SE29
DIAPHRAGM SETS	SE21
FILTERS	SE30
MAGNETS	
AUTOSTOPPER	
DRIVE UNITS	

ACCESSORIES

PRESSURE GAUGE	BP1
PRESSURE RELIEF VALVE	SE11