



# GX LINE



Innesti Rapidi in Acciaio Inox 316L  
316L Stainless Steel Couplings  
Coupleurs en Acier Inox 316L  
Kupplungen aus Edelstahl 1.4404



GX	Innesto rapido multipresa in inox		Stainless steel Multi socket quick coupler	Coupleur multiprofil en acier inox		Multiprofilkupplung aus Edelstahl
1	2	3	4	5	6	
Corpo Body Corps Körper	Ghiera di comando Command Sleeve Douille de commande Absperrhülse	Otturatore Valve Clapet Ventil	Molle Springs Ressorts Feder	Sfere Balls Billes Kugel	Guarnizioni Seals Joint d'étanchéité Dichtung	Innesti Plugs Embouts Stecker
Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)			Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302	Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420	FPM FPM FPM FPM	Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)

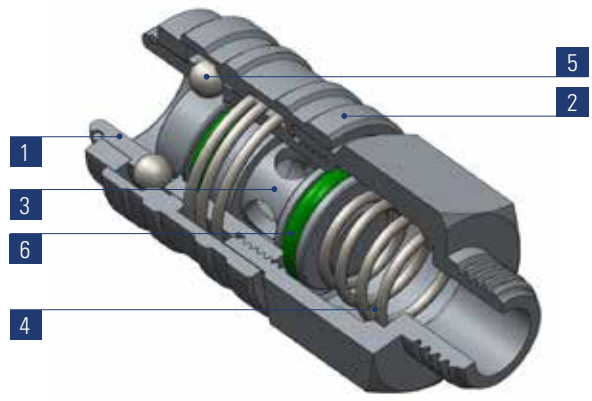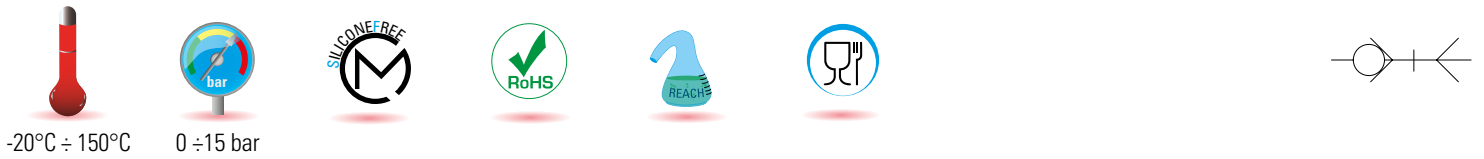

Intercambiabilità con i profili Suitable with following plugs profiles Interchangeable avec les suivants profils Austauschbar mit folgenden Profilen	Portata Flow rate Débit Durchfluß (6 bar - Δp = 1bar)
---	---

	Profilo Europeo European Profile Profil européen Europäisches Profil	820
	Profilo ISO 6150 B ISO 6150 B Profile Profil ISO 6150 B ISO 6150 B Profil	715
	Profilo Svedese Standard Swedisch Profile Profil Standard Suédois Standard schwedisches Profil	725
	Profilo Italiano Standard Italian Profile Profil Standard Italien Standard Italienisches Profil	670
	Profilo MIL C4109 MIL C4109 Profile Profil MIL C4109 MIL C4109 Profil	715
	Profilo ARO 210 ARO 210 Profile Profil ARO 210 ARO 210 Profil	705

Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1


## GX 10-11

Innesto rapido con filetto maschio

Male coupling

Coupleur mâle

Einschraubkupplung

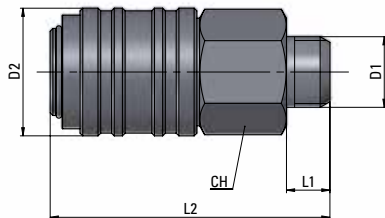

Tipo	D1	D2	L1	L2	CH	g $\Delta\Delta$
<b>11 00 14</b>	<b>G1/4</b>	23,5	10	52	21	87,8
<b>11 00 38</b>	<b>G3/8</b>	23,5	11	52	21	91,8


## GX 10-12

Innesto rapido con filetto femmina

Female coupling

Coupleur femelle

Aufschraubkupplung

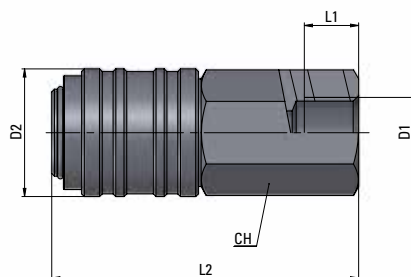

Tipo	D1	D2	L1	L2	CH	g $\Delta\Delta$
<b>12 00 14</b>	<b>G1/4</b>	23,5	10	57	21	110,9
<b>12 00 38</b>	<b>G3/8</b>	23,5	11	58	21	106,3


## GX 10-20

Innesto con filetto maschio,  
profilo europeo

Male plug according  
to european profile

Embout mâle selon profil européen

Stecker gemäss europäisches  
Profil, Einschraub



Tipo	D1	L1	HEX	g $\Delta\Delta$
<b>20 00 14</b>	<b>G1/4</b>	33	17	20,5
<b>20 00 38</b>	<b>G3/8</b>	34	21	30,4


## GX 10-21

Innesto con filetto femmina,  
profilo europeo

Female plug according  
to european profile

Embout femelle selon  
profil européen

Stecker gemäss europäisches  
Profil, Aufschraub

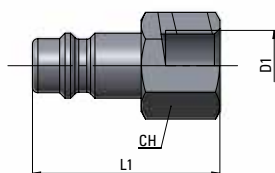

Tipo	D1	L1	HEX	g $\Delta\Delta$
<b>21 00 14</b>	<b>G1/4</b>	33	17	23,6
<b>21 00 38</b>	<b>G3/8</b>	33	21	31,7
<b>21 00 12</b>	<b>G1/2</b>	45	25	-