


T2[®] & T2-HP[™]

ENGINEERED FOR POWER

- ⚙️ Rugged die-cast aluminum housings provide unmatched performance for the long haul
- ⚙️ Study 3/4 inch axles
- ⚙️ Maintenance-free design for ease of use
- ⚙️ Infinite speed control for precise handling in the tightest spots

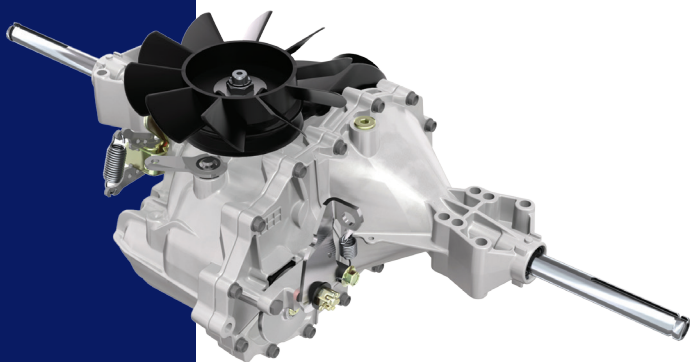

DESIGNED & ASSEMBLED IN THE USA

EFFICIENT & RELIABLE

SPECIFICATIONS

	T2		T2-HP
Overall Transaxle Reduction	20.63:1	22.68:1	25.42:1
Input Speeds	3000 rpm		
Max Hi-Idle (no load)	1800 rpm		
Min (loaded)			
Output Torque			
Continuous	105 lb-ft [142 Nm]	115 lb-ft [156 Nm]	145 lb-ft [197 Nm]
Intermittent	195 lb-ft [264 Nm]	215 lb-ft [291 Nm]	285 lb-ft [386 Nm]
Axle Shaft Diameter	0.75 in [19.05 mm]		
Axle Shaft End Options	Keyed or Two Flats		
Parking Brake Type	External Disc		
Weight of Unit	28 lb [12.7 kg]		

Specifications subject to change without notice



T2/T2HP-09/2016-V1

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**

